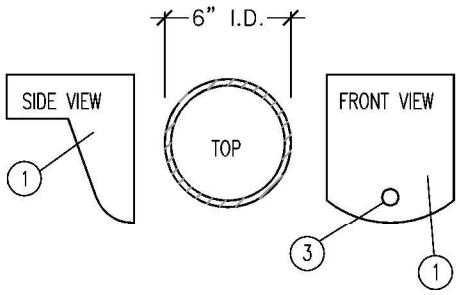

ENCLOSURE LID

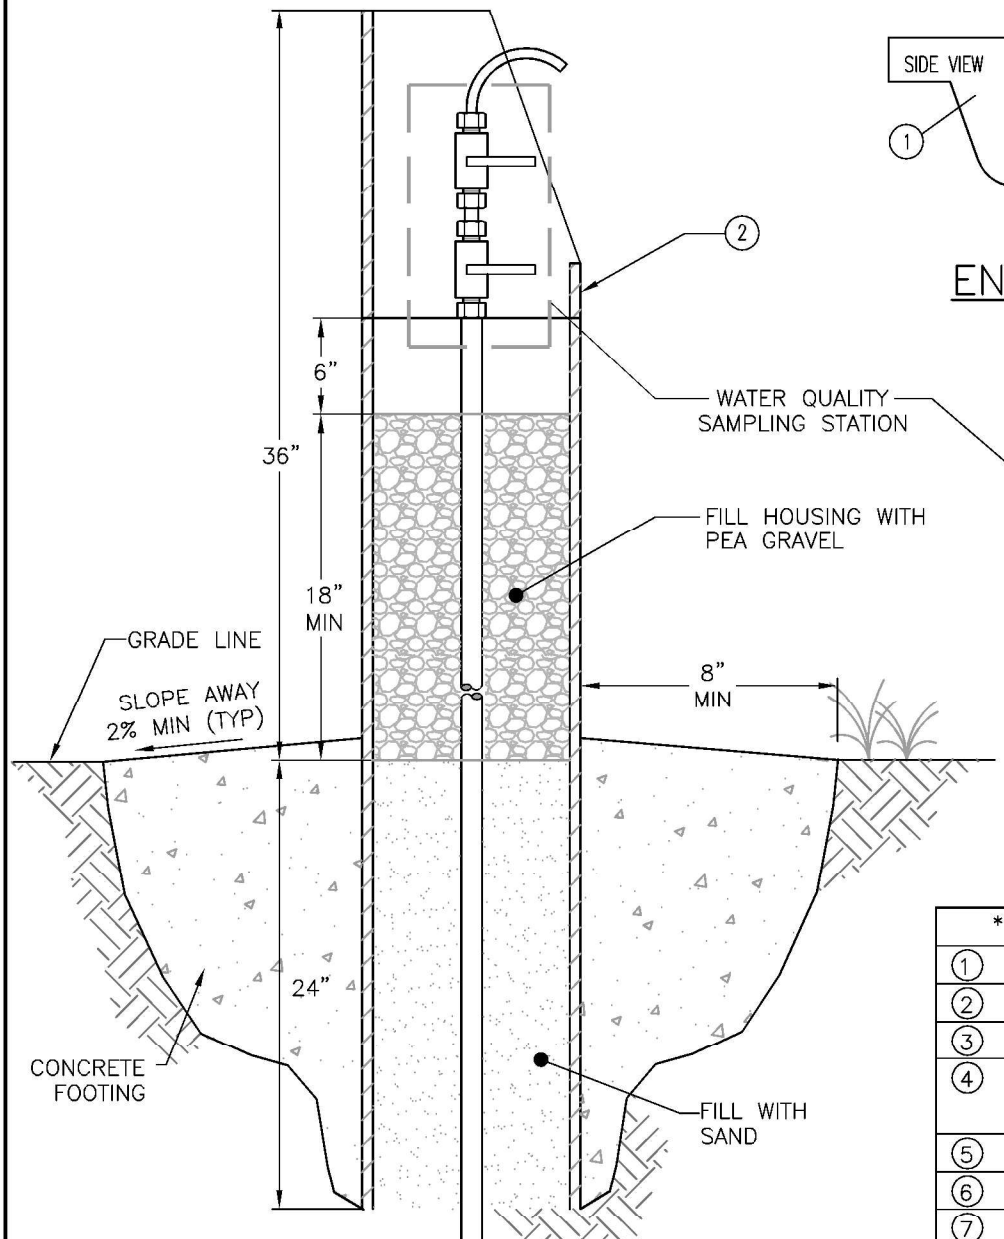

ENCLOSURE

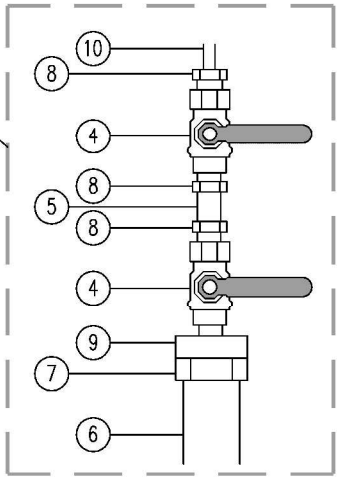

*WATER QUALITY SAMPLING STATION	
1	ALUMINUM LID
2	ALUMINUM HOUSING – 6"ø (O.D.)
3	FLUSH MOUNTED LOCK
4	1/4" BALL VALVE (CHROME BALL, TEFLON SEATS, STEEL HANDLE)
5	2" OF 1/4" COPPER TUBING
6	3/4" COPPER TUBING
7	3/4" COMPRESSION FITTING
8	1/4" COMPRESSION FITTING
9	3/4" x 1/4" REDUCER
10	1/4" SPIGOT

NOTES

1. BRASS FITTINGS, VALVES AND PIPE SHALL CONSIST OF LOW–LEAD BRASS ALLOY AND SHALL HAVE A MINIMUM WORKING PRESSURE OF 150 PSI.
2. INSTALL TRAFFIC BOLLARD(S) PER DETAIL 20 WHERE REQUIRED BY THE ENGINEER.

SCOTTS VALLEY WATER DISTRICT

WWW.SVWD.ORG

DETAIL 21

SAMPLE STATION INSTALLATION

NOT TO SCALE